


VOLTAGE DETECTOR WITH COMBINED SIGNALLING VHV - 123 kV

Group III
for outdoor use

TYPE 840.123

General Information

Voltage detectors are designed for detecting the presence of very high voltage (frequency of 50 Hz). Presence of voltage is indicated by light and acoustic signal during direct contact with hot part. Insulating pole is divided into two parts and it is made of glass - fibre laminate which is suitable for its high electrical and mechanical resistance and stability. It fulfills the requirements on the protective equipment for outdoor use. The detector is determined for outdoor use under normal climatic conditions. The indication head is water resistant. The handle is equipped with a protective rubber ring (hand guard) and insulating part with rubber rings to stop water (rain shed). Voltage detectors comply with standards ČSN EN 61243-1, IEC 61243-1.

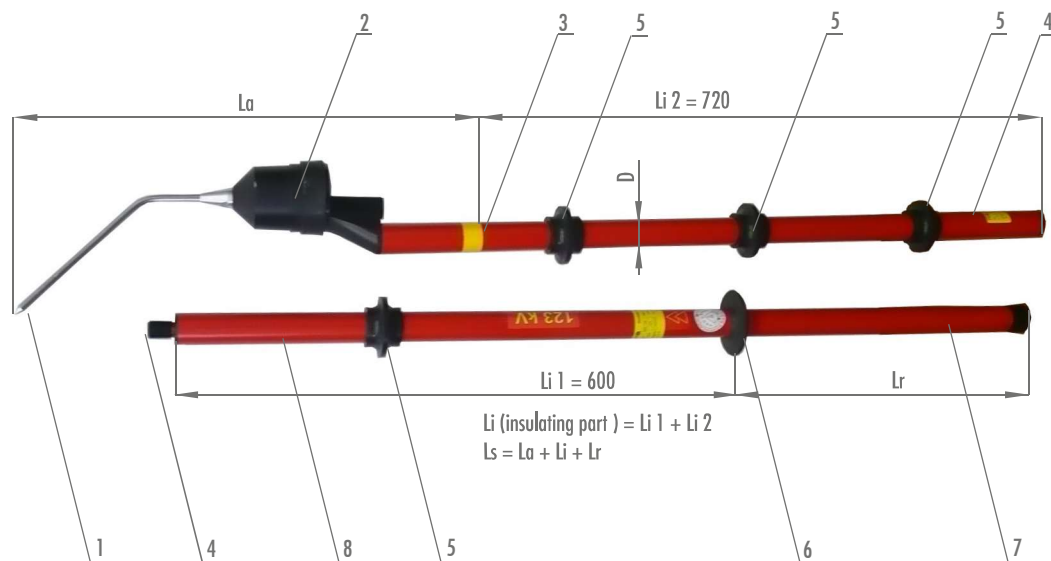

Contact electrode 123, 245kV

connecting part
(screw connection)



- 1 - contact electrode
- 2 - indicator (voltage head)
- 3 - limit mark
- 4 - insulating element
- 5 - rain sheds
- 6 - hand guard
- 7 - handle
- 8 - connecting part
- 9 - red LED
- 10 - TEST button
- 11 - label for outdoor use

Technical Data

Rated voltage [kV] network/equipment	Type	Size [mm]					Total weight [kg]
		Ls	Lr	Li	La	D	
110 / 123	840.123	2170	400	1320	450	31	1.2
Indication type	capacitive detector						
Group III	indication with one active signal - voltage present						
Climatic Class N	temperature -25°C - +55°C, humidity 20% - 96%						

VOLTAGE DETECTOR WITH COMBINED SIGNALLING VHV - 123 kV

Group III

for outdoor use

TYPE 840123

1.0 Signalling

Group III - Red LED and an alternating sound of the buzzer indicate presence of very high voltage (VHV).

2.0 Operability test

The check whether the detector is operable, press the TEST button properly until the red LED starts blinking and the buzzer sounds. If the capacity of the feeding cells (two independent alkaline batteries) drops below the set value the red LED does not go on and there is no acoustic signal. In this case it is necessary to replace the batteries. If one of batteries is out of order, the detector is still operable. Connect both poles by means of connecting part and check the strength of joint.

3.0 In-operation testing procedure

- Visual check** - the detector must be in condition, it must not be mechanically damaged. Both poles are connected by means of a screw connection and its strength should be verified
- Function test** - before the use check the proper function of comparator by pressing the **TEST** button. The detector is operable if the both red LEDs are blinking and the buzzer gives an alternate sound signal until the **TEST** button is pressed. When the **TEST** button is released, both red LEDs must stop light and the buzzer must stop giving a sound. Now the comparator is ready for use
- Indication process** - each phase is tested separately as follows. The detector must be held below the hand guard by the handle while the contact electrode is attached to the checked part. The part of pole below the yellow mark (insulating part - between the handle and the yellow mark) must not get into the space under voltage. Red LEDs and an alternating sound of the buzzer indicate presence of high voltage (HV). If there is no voltage, red LEDs do not light and the buzzer does not give a sound
- Final operability** - the detector operability must be retested after each detection in accordance with point 2.0 - Operability test. Only if the operability test is successful it is possible to say whether the tested parts are under voltage or not. It is possible to perform further operations (e.g. short-circuiting)

4.0 Replacement of feeding cells

The feeding is secured by two alkaline batteries type E23A (VA23GA, MS21, MN21) with the tension 12V built-in in the indication head. The necessity of their replacement is checked by the testing button (point 2.0 see above).

- 1) Release the check nut of the contact electrode
- 2) Unscrew the contact electrode
- 3) Unscrew the plastic cover of the indication head

The batteries are fast held in the holder. Use a small screwdriver or a pocketknife for the replacement. Get under the battery the screwdriver (knife) and gently press out of holder. Put on the holder the new battery according to the polarity and gently press into the holder.

5.0 Operating conditions

The detectors are intended for use in ordinary indoor and outdoor conditions, normal climatic group with the temperature -25°C - $+55^{\circ}\text{C}$, the humidity 20% - 96% (class N). **They can be used in the rain, fog and snowfall.** The indication head is water resistant. The handle is equipped with a protective rubber ring (hand guard) and the insulating part with rubber rings to stop water (rain shed). The nominal voltage of the detector is always marked on the detector's pole.

The voltage detector should only be used on electrical facilities with nominal voltage for which it is designed.

The instructions for use should be incorporated into the local operating and safety regulations.
The detector may only be used by qualified personnel.

6.0 Testing

The detector is type-tested according to valid standards by the authorised laboratory. Each detector is separately tested piece by piece before expedition and labeled too. The label includes the test date (quarter/year) and the number of the authorised laboratory. The detector must be tested regularly by the authorised laboratory.

7.0 Packing

The detector is expedited foil wrapped. The set can be delivered in the water-resistant cloth wrapping after the agreement with the producer. There is enclosed the function description and the directions for use, the Certificate about quality and completeness of product and product test.

8.0 Storage and maintenance

The detector must be kept in condition. The storage place must be dry and dust-free. The equipment must be protected against the mechanical damage. The humidity should be 70% as a maximum and the temperature 40°C as a maximum.

For common cleaning use damp cloth, for more resistance dirt use technical alcohol. Do not use any organic solvents or any substances which may have a decolorizing effect.

9.0 Guarantee

The guarantee period is 24 months long and starts on the day the product is delivered to the customer. It applies to any defects probably caused by the manufacture. The guarantee does not cover any defects resulting from improper use, unprofessional handling, or unsuitable storing.